

## GLASS PASSIVATED BRIDGE RECTIFIERS

### Features

- ◆ Surge overload rating -350 amperes peak
- ◆ Ideal for printed circuit board
- ◆ Reliable low cost construction utilizing molded plastic technique
- ◆ Plastic material has U/L flammability classification 94V-0


### Mechanical Data

**Case :** JEDEC GBU Molded plastic body

**Terminals :** Solder plated, solderable per MIL-STD-750, Method 2026

**Polarity :** Polarity symbol marking on body

**Mounting Position :** Any

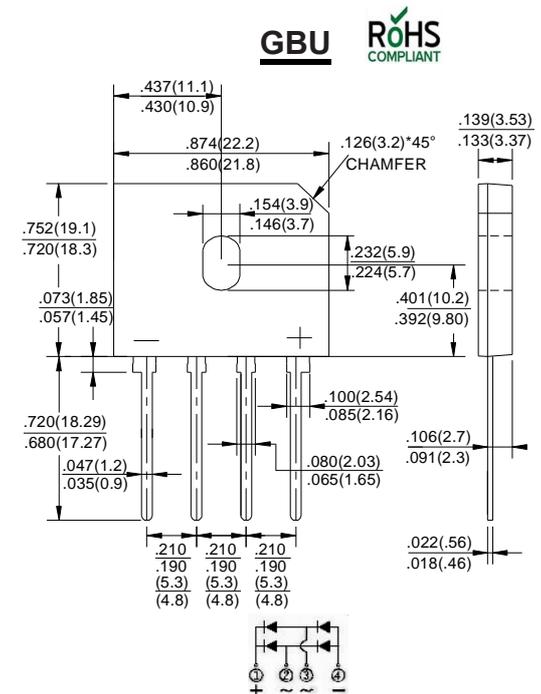

### Maximum Ratings And Electrical Characteristics

Dimensions in inches and (millimeters)

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	GBU25005	GBU2501	GBU2502	GBU2504	GBU2506	GBU2508	GBU2510	UNITS
Marking Code									
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum average forward (with heatsink NOTE 2) Rectified current @ $T_c=100^\circ\text{C}$ (without heatsink)	$I_{AV}$				25.0				A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$				350				A
Rating for Fusing ( $t < 8.3\text{ms}$ )	$I^2t$				508				$\text{A}^2\text{s}$
Maximum forward voltage at 12.5A DC	$V_F$				1.0				V
Maximum DC reverse current at rated DC blocking voltage	$I_R$				10				$\mu\text{A}$
					0.5				$\text{mA}$
Typical Junction Capacitance (Note 1)	$C_J$				70				$\text{pF}$
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$				2.2				$^\circ\text{C}/\text{W}$
Operating junction temperature range	$T_J$				-55 to +150				$^\circ\text{C}$
storage temperature range	$T_{STG}$				-55 to +150				$^\circ\text{C}$

NOTES: 1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

2. Device mounted on 75mm\*75mm\*1.6mm cu plate heatsink.

3. The typical data above is for reference only.

## Ratings And Characteristic Curves

FIG.1-MAXIMUM FORWARD SURGE CURRENT

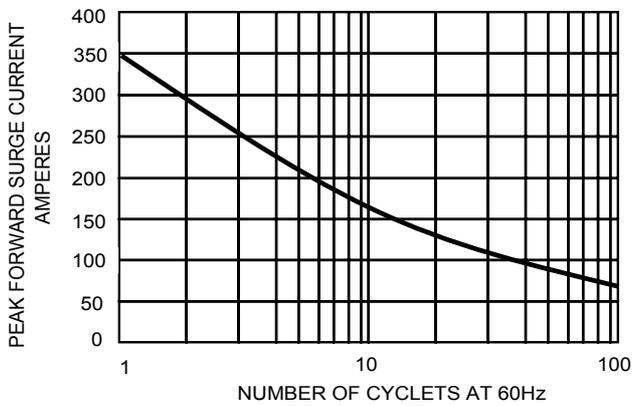


FIG.2- DERATING CURVE  
OUTPUT RECTIFIED CURRENT

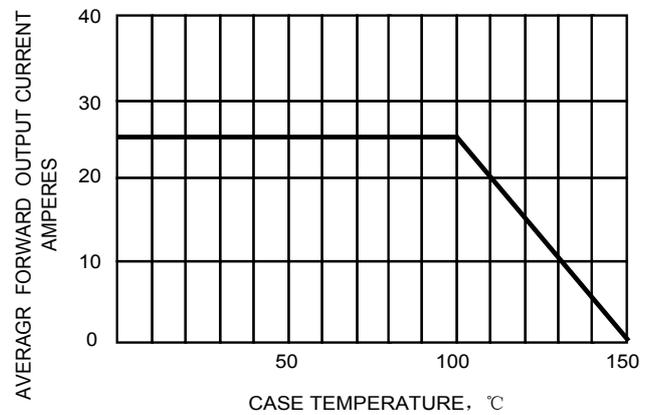


FIG.3-TYPICAL FORWARD CHARACTERISTICS


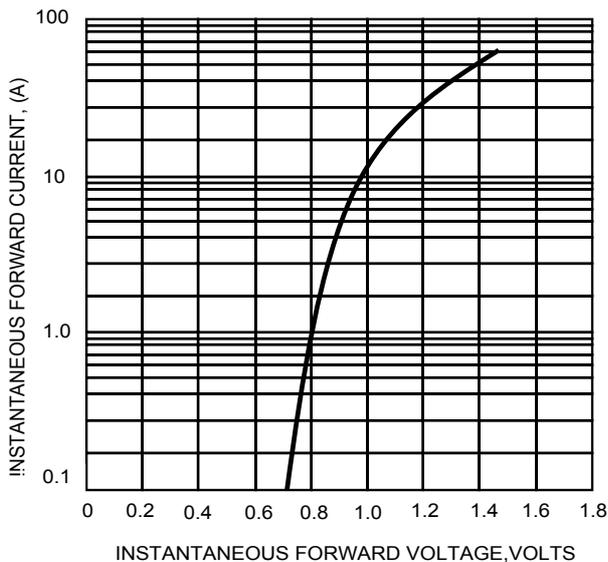


FIG.4-TYPICAL REVERSE CHARACTERISTICS

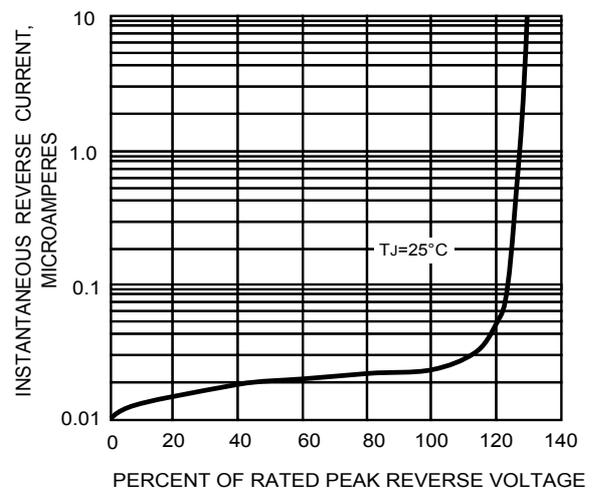

The cruve graph is for reference only